


NSE[®]



شاشة المكعبات MAGIC CUBE

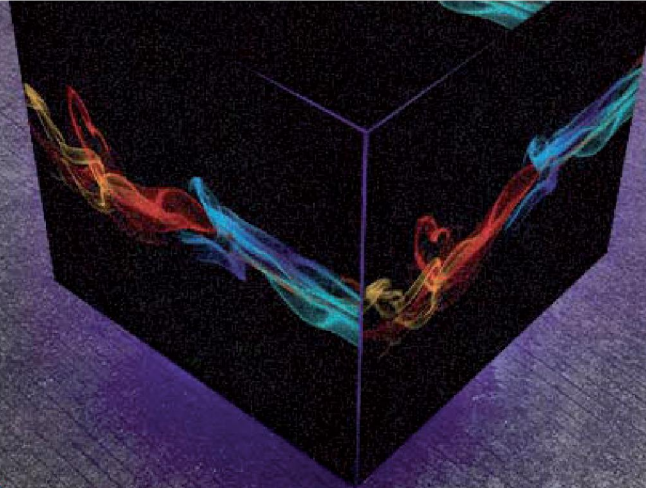

شاشة مكعبات سحرية
ب 4 و 5 واجهات حسب إختيارك

شاشة المكعبات السحرية تنقل
طريقة العرض إلى عالم رقمي
جديد ومبدع لجذب الانتباه بطريقة إبداعية

واجهات شاشة متعددة (أربعة و خمسة واجهات)
بأحجام ومقاسات متنوعة حسب إختيارك

640x640x640mm



480x480x480mm



320x320x320mm



MAGIC CUBE LED display

NSI




شاشة المكعبات السحرية تتميز بوزن خفيف للغاية وبمقاومة عالية للرياح و باقي العوامل الجوية مثل الأمطار والغبار لا تحتاج إلى متخصص ببتثبيت والتشغيل



▶ PLUG AND PLAY

سهولة الإستخدام والتشغيل بدون
الحاجة إلى متخصص أو فني لذلك

كل ما عليك هو ربطها بجهاز الحاسوب
أو تطبيق الهاتف المحمول وبدأ العرض

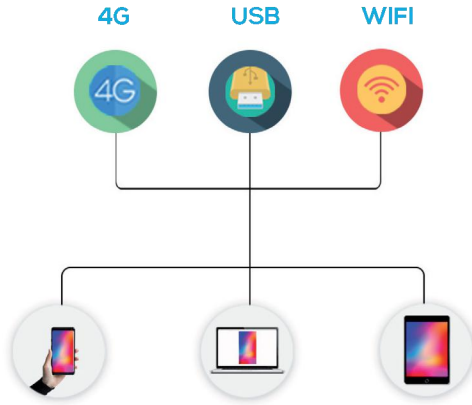

وصل بالكهرباء وإبدأ العرض
Plug and play device.



خيارات التثبيت المتعددة

واقفة
Standing
▽



△
Hanging
معلقة



△
Wall-Mounted
على الحائط



NUMEROUS APPLICATIONS



شاشة المكعبات السحرية تتمتع بقوة سطوع عالي وجودة ألوان عالية تجعلها مميزة وواضحة بجميع الأوقات بالنهار أو المساء مما يجلب نظر المارة بالشكل الإبداعي لها

بالإمكان تثبيتها خارج المبنى على الحائط بكل سهولة لتعطي للمكان شكل مميزة رائع



MAGIC CUBE LED display

SPECIFICATION

Type	Outdoor Magic Cube LED display			
Model:	LC303	LC305	LC204	LC206
Application environment	Outdoor	Outdoor	Outdoor	Outdoor
Pixel Pitch	P3	P3	2.5mm	2.5mm
Pixel Configuration	SMD 1921	SMD 1921	SMD 1415	SMD 1415
Pixel Density	111,111 pixels/m ²	111,111 pixels/m ²	160,000 pixels/m ²	160,000 pixels/m ²
Scan Method	1/16 Scan	1/16 Scan	1/16 Scan	1/16 Scan
Module Dimensions (W x H)	192*192mm	192*192mm	160*160mm	160*160mm
Module resolution	64*64 dots	64*64 dots	64*64 dots	64*64 dots
Screen size	384 × 384mm / side	576 × 576mm / side	480 × 480mm / side	640 × 640mm / side
Screen resolution	128*128 dots	192*192 dots	192*192 dots	256*256 dots
Module quantity	4 pcs / side	9 pcs / side	9 pcs / side	16 pcs / side
Screen design	5 sided / 4 sided (optional)	5 sided / 4 sided (optional)	5 sided / 4 sided (optional)	5 sided / 4 sided (optional)
Case Material	Steel / Aluminum	Steel / Aluminum	Steel / Aluminum	Steel / Aluminum
Weight	23kg/ set	32kg/ set	25kg/ set	40kg/ set
Colours	281 trillion	281 trillion	281 trillion	281 trillion
Contrast Ratio	2,000 : 1	2,000 : 1	2,000 : 1	2,000 : 1
Average Power Consumption	200W / set	300W / set	240W / set	360W / set
Max Power Consumption	600W / set	800W / set	800W / set	1200W / set
Brightness	≥5000 nits	≥5000 nits	≥5500 nits	≥5500 nits
Refresh Rate	>1,920 Hz	>1,920 Hz	>1,920 Hz	>1,920 Hz
Horizontal Viewing Angle	140°	140°	140°	140°
Vertical Viewing angle	140°	140°	140°	140°
Expected Lifetime	100, 000 Hrs	100, 000 Hrs	100, 000 Hrs	100, 000 Hrs
Operating Temp/Humidity	-20°C-50°C / 10%-90%	-20°C-50°C / 10%-90%	-20°C-50°C / 10%-90%	-20°C-50°C / 10%-90%
Servicing	Rear	Rear	Rear	Rear
IP Rating	IP 65	IP 65	IP 65	IP 65
Control method	USB/WIFI /4G (optional)	USB/WIFI /4G (optional)	USB/WIFI /4G (optional)	USB/WIFI /4G (optional)
Accessories	Wall mounted kit	Wall mounted kit	Wall mounted kit	Wall mounted kit
Package:	Honey box	Honey box	Honey box	Honey box + wooden box



SPECIFICATION

Type	Indoor P2.5 Magic Cube LED display		
Model:	LC2I3	LC2I4	LC2I6
Application environment	Indoor	Indoor	Indoor
Pixel Pitch	2.5mm	2.5mm	2.5mm
Pixel Configuration	SMD 2121	SMD 2121	SMD 2121
Pixel Density	160,000 pixels/m ²	160,000 pixels/m ²	160,000 pixels/m ²
Scan Method	1/32 Scan	1/32 Scan	1/32 Scan
Module Dimensions (W x H)	160*160mm	160*160mm	160*160mm
Module resolution	64*64 dots	64*64 dots	64*64 dots
Screen size	320 × 320mm / side	480 × 480mm / side	640 × 640mm / side
Screen resolution	128*128 dots	192*192 dots	256*256 dots
Module quantity	4 pcs / side	9 pcs / side	16 pcs / side
Screen design	5 sided / 4 sided (optional)	5 sided / 4 sided (optional)	5 sided / 4 sided (optional)
Case Material	Steel / Aluminum	Steel / Aluminum	Steel / Aluminum
Weight	13kg/ set	22kg/ set	36kg/ set
Colours	281 trillion	281 trillion	281 trillion
Contrast Ratio	2,000 : 1	2,000 : 1	2,000 : 1
Average Power Consumption	100W / set	160W / set	250W / set
Max Power Consumption	350W / set	550W / set	810W / set
Brightness	≥800 nits	≥800 nits	≥800 nits
Refresh Rate	>1,920 Hz	>1,920 Hz	>1,920 Hz
Horizontal Viewing Angle	140°	140°	140°
Vertical Viewing angle	140°	140°	140°
Expected Lifetime	100, 000 Hrs	100, 000 Hrs	100, 000 Hrs
Operating Temp/Humidity	-20°C-50°C / 10%-90%	-20°C-50°C / 10%-90%	-20°C-50°C / 10%-90%
Servicing	Rear/ Front (optional)	Rear/ Front (optional)	Rear/ Front (optional)
IP Rating	IP 33	IP 33	IP 33
Control method	USB/WIFI /4G (optional)	USB/WIFI /4G (optional)	USB/WIFI /4G (optional)
Accessories	Wall mounted kit/ Hanging bar	Wall mounted kit/ Hanging bar	Wall mounted kit/ Hanging bar
Package:	Honey box	Honey box	Honey box +wooded box



NSE



النوفايين ، شارع الكهرباءية مقابل جامع أبو حجر
طرابلس - ليبيا

00218 91 254 84 39

sales@nseled.ly