




PDF Version

NSE[®]

TOTEM LED DISPLAY

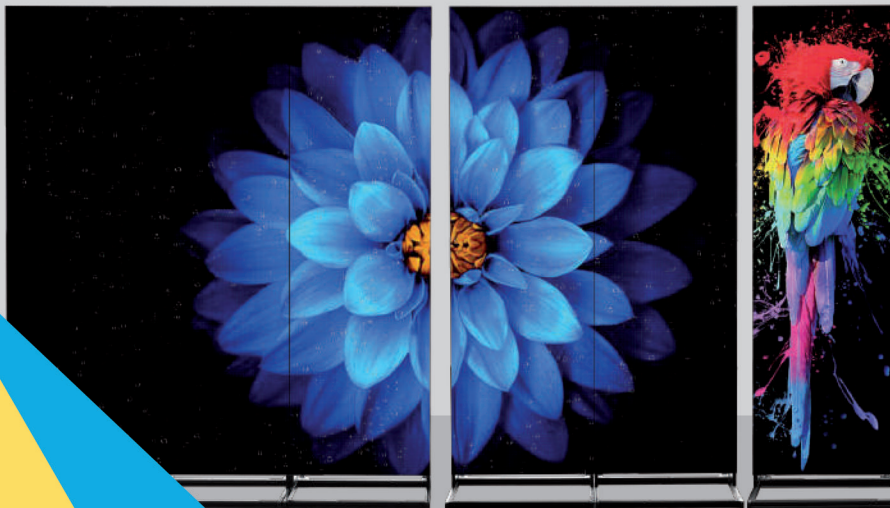

TOTEM - INDOOR
DIGITAL LED
DISPLAY

شاشة TOTEM




- عرض بجودة عالية الجودة
- وزن خفيف وسمك رقيق
- قاعدة تثبيت بزوايا متعددة
- تحكم ذكي عن بعد
- نسبة وضوح من جميع المسافات
- حساسات تعديل إضاءة تلقائية




▶ SMART CONTROL

Network HDIM USB WIFI

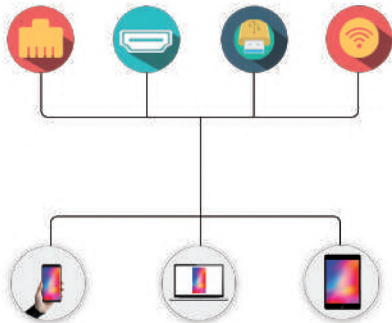

- Synchronous & Asynchronous Dual-mode Media Player
- Real-time Zoom In And Out
- 8 GB Memory
- Supports USB Expansion
- With HDMI Interface and Audio Port

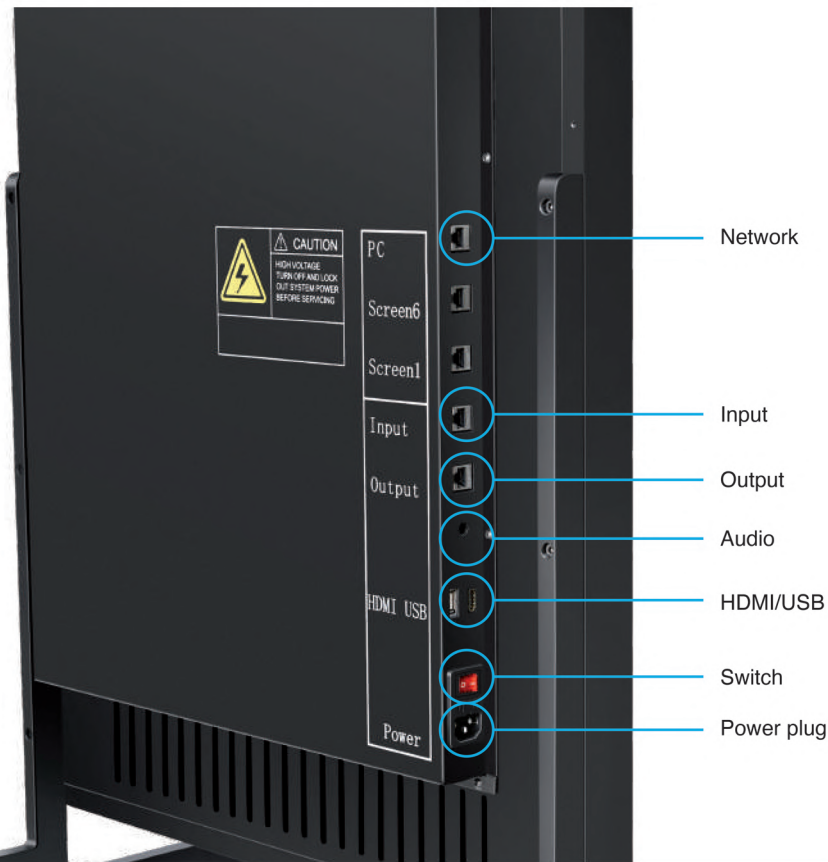

شاشة واحدة ومتعددة الاستخدام

شاشة طويلة
Free - Standing
▽



شاشة حائط
Wall - Mounted
▽



معلقة
Hanging
▽



ترتيب إحصافي
Creative Stitching
▽



▶ PLUG AND PLAY


شاشة توتيم صممت لكي تكون سهلة الإستعمال
بدون برامج وأدوات معقدة ، ما عليك سوى توصيل
الشاشة بمصدر الكهرباء وبدأ العرض فوراً عن طريق
الأجهزة المحمولة وبدون كوابل أو توصيلات

تتميز الشاشة ببدأ التشغيل تلقائياً حتى بعد
فصل التيار الكهربائي ورجوعه



وزن خفيف وسمك رقيق جداً

- وزن خفيف
- سمك رقيق جداً




45mm

38 KG

▶ MULTI - SCREEN SPLICING

- إمكانية ربط أكثر من شاشة
- صورة كاملة عالية الجودة
- سمك رقيق جداً
- سهولة التنقل وبوزن خفيف

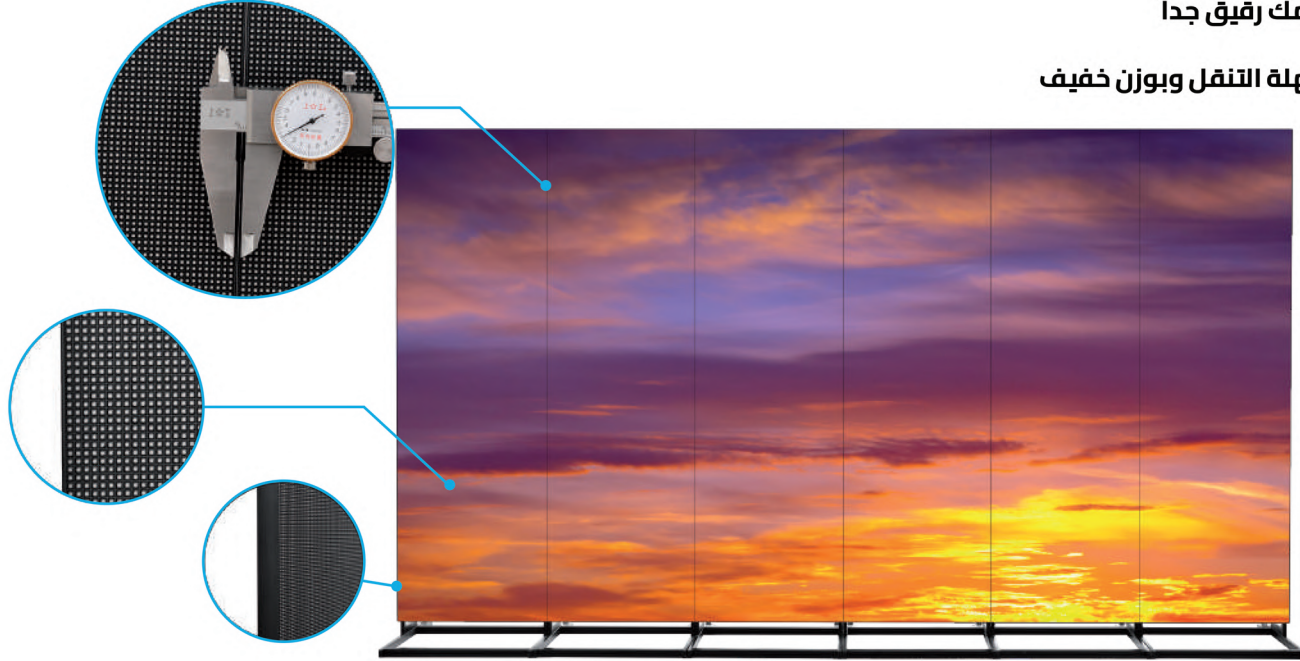

TOTEM - INDOOR DIGITAL LED DISPLAY

- أسواق تجارية
- الفنادق
- المصارف
- المقاهي والمطاعم
- المحلات التجارية
- المستشفيات
- المطاعم
- المدارس
- المعارض
- الأحداث والمؤتمرات



TOTEM P3
INDOOR DIGITAL LED DISPLAY



35 KG

57 cm

TOTEM P2.5
INDOOR DIGITAL LED DISPLAY



38 KG

64 cm

TOTEM P2
INDOOR DIGITAL LED DISPLAY



46 KG

77 cm



حساسات تعديل الإضاءة تلقائياً



إمكانية توصيل مكبرات صوتية
خارجية بشاشات توتيم بدون أي
تعقيدات أو صعوبات



الفرق بين الشاشة الداخلية والخارجية



مقاومة للماء وسهولة الحركة

- وزن خفيف
- سمك رقيق
- سهولة الحركة



38 KG



TOTEM - indoor and outdoor LED display

NSM



مواصفات الشاشة الداخلية

Model Type	PT2	PT2.5	PT3
Application	Indoor/ Semi-Outdoor	Indoor/ Semi-Outdoor	Indoor/ Semi-Outdoor
Pixel pitch	2mm	2.5mm	3 mm
Density	250,000 dots /SQM	160,000 dots /SQM	111,111 dots /SQM
LED Type	SMD1515 Mat Black	SMD 2121 Mat Black	SMD 2121 Mat Black
Pixel type(R / G / B)	1R1G1B (3 in 1)	1R1G1B (3 in 1)	1R1G1B (3 in 1)
Module size	256 x 128mm	160 x 160mm	192 x 192mm
Module Resolution	128*64pixel	64*64pixel	64*64 pixel
Screen Size (H*W)	768*1920mm	640*1920mm	576*1920mm
Feet Size	2.52 * 6.3 feet	2.10* 6.3 feet	1.88 * 6.3 feet
Screen Resolution	384 * 960 pixel	256 * 768 pixel	192 * 640 pixel
Frame Size	1930mm(H)*776mm(W)*45mm(T)	1930mm(H)*648mm(W)*45mm(T)	1930mm(H)*584mm(W)*45mm(T)
Case Material	Aluminum	Aluminum	Aluminum
Weight	46kg/ unit	38kg/ unit	35kg/ unit
Drive mode	1/32 Scan	1/32 Scan	1/16 Scan
Viewing Distance	≥ 2 M	≥ 2.5 M	≥ 3 M
Brightness	≥ 1,000 cd/m²	≥ 1,000 cd/m²	≥ 1,000 cd/m²
Viewing Angle	140° (H)/140°(V)	140° (H)/140°(V)	140° (H)/140°(V)
Refresh rate	≥1,920 Hz (3840HZ optional)	≥1,920 Hz (3840HZ optional)	≥1,920 Hz (3840HZ optional)
Input voltage	AC90-240V	AC90-240V	AC90-240V
Maximum Power Consumption	1170Wper unit	750Wper unit	600W per unit
Average Power Consumption	350Wper unit	220Wper unit	280W per unit
Control method:	Asynchronous(WIFI/USB/LAN/HDMI)	Asynchronous (WIFI/USB/LAN/HDMI)	Asynchronous (WIFI/USB/LAN/HDMI)
Temperature Operating (°C)	-10°~+40°	-10°~+40°	-10°~+40°
Working Humidity	10%~95%RH	10%~95%RH	10%~95%RH
IP Rating	IP20	IP20	IP20
Certificate	CE/ROHS/FCC	CE/ROHS/FCC	CE/ROHS/FCC

مواصفات الشاشة الخارجية

Model Type	P2.5 - 640x1920 mm	P3 - 576x1920 mm	P3 - 768x1920 mm
Application	Outdoor	Outdoor	Outdoor
Pixel pitch	2.5mm	3mm	3 mm
Density	160000	111111	111111
LED Type	SMD1415	SMD1921	SMD1921
Pixel type(R / G / B)	1R1G1B (3 in 1)	1R1G1B (3 in 1)	1R1G1B (3 in 1)
Module size	160 x 160mm	192 x 192 mm	192 x 192 mm
Module Resolution	64 x 64 pixel	64 x 64 pixel	64 x 64 pixel
LED Mouldle layout(W×H)	4 x 12mm	3 x 10	4 x 10
Display Size	640*1920mm	576 x 1920mm	768 x 1920 mm
Display Resolution	256*768pixel	192 x 640pixel	256 x 640pixel
Display area	1.23m ²	1.11m ²	1.48m ²
Cabinet Size(mm)	643 x 1930mm	579 x 1930 mm	781 x 1930 mm
Resolution(W×H)	256 x 768	192x640	256 x 640
Case Material	Aluminum	Aluminum	Aluminum
Weight	45kg/unit	50kg /unit	55kg /unit
Drive mode	1/32scan	1/16scan	1/16scan
Viewing Distance	>2m	>3m	>3m
Brightness	5000 cd/m ²	5000 cd/ m ²	5000 cd/ m ²
Viewing Angle	140°/140°	140°/140°	140°/140°
Refresh rate	≥1920Hz	≥1920Hz	≥1920Hz
Input voltage	AC 240/100±10%	AC 240/100±10%	AC 240/100±10%
Maximum Power Consumption	1350W	1050W	1400W
Average Power Consumption	450W	315W	420W
Control method:	Asynchronous(WIFI/USB/LAN/HDMI)	Asynchronous(WIFI/USB/LAN/HDMI)	Asynchronous(WIFI/USB/LAN/HDMI)
Temperature Operating (°C)	-40°~+75°	-40°~+75°	-40°~+75°
Working Humidity	10%-90%	10%-90%	10%-90%
IP Rating	IP65	IP65	IP65
Certificate	CE/ROHS/FCC	CE/ROHS/FCC	CE/ROHS/FCC

